


WH-10L-35

Low Profile Hand Pallet Truck

- ◆ Easy access to the lowest pallets and containers with the minimum floor clearance of 35mm only.
- ◆ High quality surface treatment.
- ◆ Reliable Pump, Integrated AC pump, more than 1 million pcs use in China per year, high reliable quality, extremely low failure rate.

| MODEL | | WH-10L-35 | |
|-------------------|-------------------------------------|-----------|----------------------|
| FEATURE | | | |
| 1.1 | capacity | kg | 1000 |
| 1.2 | pump type | | AC |
| WHEEL | | | |
| 2.1 | wheel(drive/load) Type | | PU+ IRON |
| 2.2 | size of steering wheel | ΦD mm | 160*50 |
| 2.3 | size of Loading wheel(single wheel) | Φd mm | / |
| 2.4 | size of Loading wheel(double wheel) | Φd mm | 30X70 |
| DIMENSIONS | | | |
| 3.1 | lifting height | h mm | 50 |
| 3.2 | max. fork lifting height | H mm | 85 |
| 3.3 | Lowered height of fork | H1 mm | 35±5 |
| 3.4 | fork outside distance | W mm | 530/685 |
| 3.5 | fork length | L mm | 1120 |
| 3.6 | fork thickness | mm | 4 |
| 3.7 | handle | | Coated square handle |

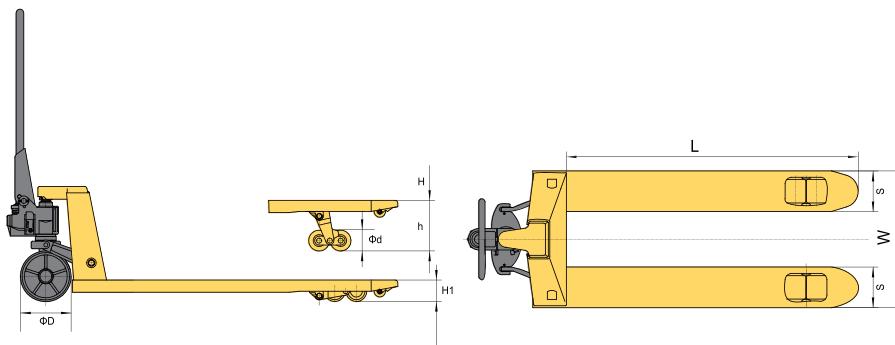

Hand Pallet Truck

STRONG CHASSIS DESIGN



- ◆ Full stiffener + Reinforced half Stiffener on both sides.
- ◆ Solid push rod.




- ◆ Fork thickness : 3.75mm.



- ◆ Unique wheel fork design : Steady bolt.

- ◆ Extra reinforcement rod on top of the chassis.
- Leads to a longer chassis life time.

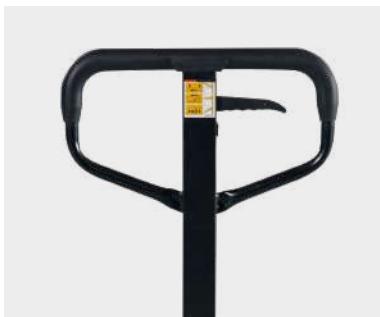

Ergonomic handle

- ◆ Square handle with rubber coated, comfort and easy operation.