

100+
years of
Trust &
Reliability

 **Eagle**[®]
SINCE 1918
SCALE • UPSCALE • PROVED • APPROVED



HAND PALLET TRUCK

HAND PALLET TRUCK


Our range of hand pallet trucks offer a durable and low maintenance product with a proven track record at an economical price. Many features such as double fork rollers, Polyurethana wheels release operation controls are included as standard.

The frames are made from a heavey grade steel construction and finished in an epoxy powder coated paint that offers greate Anti-corroision resistance. Polyurethane wheels are generally the most popular wheel type and are cast wheel with a polyurethane tyre around the outer, this wheel gives a better grip on smooth floors and is quiter running than Nylon.

This softer wheel type also tends to be better fo use on delicate flooring (finished floor surface). Industry standard size for lifting open and close bottom pallets of various sizes.

Excellent hydrolic pump unit for low maintenance.


- ✓ Excellent hydrolic pump unit for low maintenance.
- ✓ Heavy duty steel construction with epoxy powder coated finish to give greater anticorrosion resistance.
- ✓ Three position trigger Lifting-neutral-Lift. Nylon double fork rollers and standard wheels.
- ✓ Specially designed of lift most pallet sizes in use.
- ✓ Bullet connection between steering shaft and pump piston.
- ✓ Number of pump strokes to full (Lift height per full stroke 12mm).
- ✓ Reliable oil lak-proof hydraulic system.
- ✓ Easy to manoeuvre with 180 degrees turning radius.
- ✓ Grease fittings at all pivotal points ensuring long life and easy maintenance.
- ✓ Special lowering valve to control the rate of descent and over load by-pass valve to make the trucks durable.

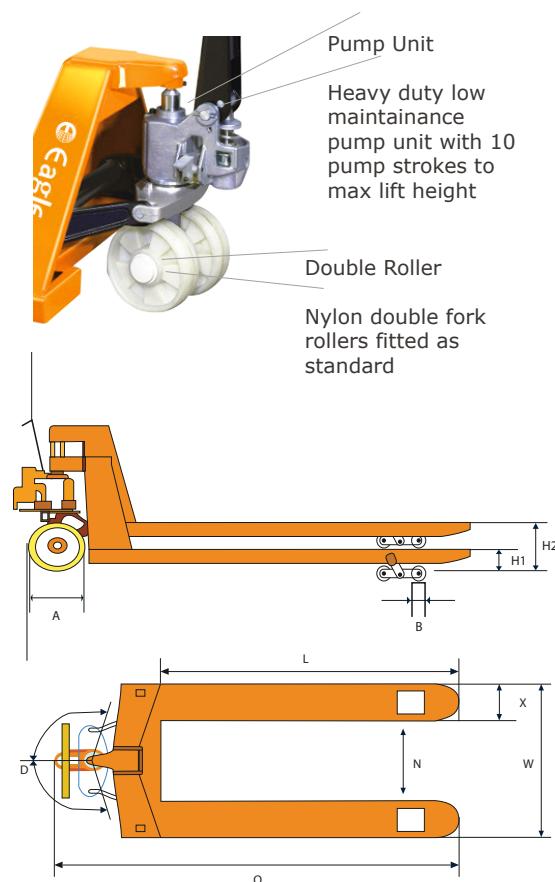

OPTIONS WHEELS AVAILABLE:



AVAILABLE SUPER LONG TROLLEY WITH PU WHEELS

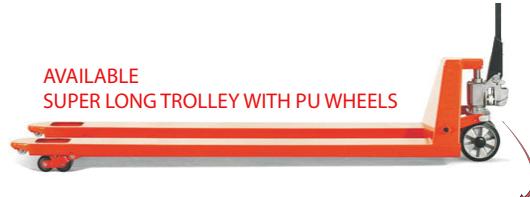

MODEL		EPT - 55011		EPT - 68512		EPT - 55020
Load Capacity	kg	2500	3000	2500	3000	2000
Min fork height	mm (H1)	75		75		75
Max fork height	mm (H2)	200		200		200
Steering wheel size	mm (A)	185x55		185x55		185x55
Fork roller size	mm (B)	70x75		70x75		70x75
Fork width	mm (X)	160x55		160x55		160x55
Fork length	mm (L)	1150		1220		2000
Fork overall width	mm (X)	550		685		540
Fork inner width	mm (N)	230		365		220
Overall length	mm (O)	1500		1570		2350
Steering	°D (D)	180		180		180
Net weight	kg	67		74		99